



浙江亨泰智能设备有限公司

ZHEJIANG HENGTAI INTELLIGENT EQUIPMENT CO.,LTD

公司简介

COMPANY INTRODUCTION

浙江亨泰智能设备有限公司前身是创立于1995年的温州市亨泰缝制设备有限公司和创立于2005年的温州市盛凯机械科技有限公司，历经二十余年的风雨兼程和顽强拼搏，两家公司于2014年实现了强强联合，今天的新亨泰，在温州瓯江口的新建厂房42000平米已投产，公司已成为了一家专业级特种智能缝纫设备，医疗智能化设备，家纺自动化设备及定制化智能设备的制造商，产品活跃在全球几十个国家和地区。

公司注重产品的创新与发展，生产工艺先进技术力量雄厚，检测设备齐全。先后获得国家发明专利2项，国家实用新型专利85项，主起草行业标准1项，参与制订行业标准1项。已全面实施信息化管理，在国内通过ISO9001质量管理体系认证，ISO14001环境管理体系认证，产品通过欧盟CE认证。公司秉承以“领先技术和卓越品质”为先导，先后获得：国家高新技术企业，市级研发中心、旗下产品被中国缝制机械协会评选为CISMA2017 智慧缝制示范产品及CISMA2021主题示范产品。

展望未来，公司将“致力于推动缝纫与新兴智能技术融合与应用，协助客户实现卓越突破和发展”的使命，遵循“战胜自我、追求卓越”的企业精神，秉承“以人为本、诚实守信、不断创新、质量第一”的经营理念；树立“诚信、创新、专注、共赢”的核心价值观，为打造具备可持续发展的新亨泰，不断努力前行。



跨越中的亨泰魅力无限



Zhejiang Hengtai Intelligent Device Co., Ltd. is the predecessor of Wenzhou Hengtai Sewing Equipment Co., LTD., which founded in 1995 and Wenzhou Shengkai Machinery Technology Co., LTD., which founded in 2005. After more than 20 years of trials hardships and tenacious struggle, the two companies in 2014 achieve a strong combination. Striding into new journey, Hengtai company of the new plant 42000 square meters has been put into production in Wenzhou Oujiang Estuary, the company has become a world-class special sewing equipment, medical intelligent equipment, home textile automation equipment and customized intelligent equipment manufacturers, products are active in dozens of countries and regions around the world.

The company focuses on product innovation and development, strong production technology advanced technical force, complete testing equipment. It has obtained 2 national invention patents, 85 national utility model patents, drafted 1 industry standard and participated in the formulation of industry standard. Has fully implemented information management, in the domestic peers took the lead through the ISO9001 quality management system certification, ISO14001 environmental management system certification, products through the EU CE certification. Adhering to the "leading technology and excellent quality" as the guide, the company has been awarded: national high-tech enterprises, municipal R & D center, selected by the China Sewing Machine Association as CISMA2017 smart sewing demonstration products and CISMA2021 theme demonstration products.

Looking forward to the future, the company will be "committed to promoting the integration and application of sewing and emerging intelligent technology, to help customers achieve excellent breakthrough and development" mission, following the "victory over self, the pursuit of excellence" spirit of enterprise, adhering to the "people-oriented, honest and trustworthy, continuous innovation, quality first" business philosophy; Establish the core values of "integrity, innovation, focus, win-win", and constantly strive to build a new Hengtai with sustainable development

THE ONLY SHECIALIZED MANUFACTURER IN CHINA TO PRODUCE EIGHT SERIES ZIGZAG
SEWING MACHINES AND VARIOUS SPECIAL SEWING MACHINES

亨泰

目前中国唯一生产八大系列珠边机及各种特种机的专业厂家

- ◆ 1995年成立温州亨泰缝制设备有限公司;
wenzhou hengtai sewing equipment co.,ltd establish in 1995.
- ◆ 1995年生产出中国第一台GL-120珠边机;
the first hand stitch sewing machine GL-120 produced in 1995 in China
- ◆ 2000年生产出中国第一台HT-780珠边机、HT-788珠边机;
the first hand stitch sewing machine HT-780, HT-788 in 2000 in China
- ◆ 2002年生产出中国第一台HT-781珠边机;
the first hand stitch sewing machine HT-781 in 2002 in China
- ◆ 2004年新厂区落成, 标志着中国特种缝纫机的又一次飞跃;
New factory 's district completion means special area sewing machine making a big improvement in 2004
- ◆ 2005年亨泰人欢庆10周年庆典之际, 全新推出新一代智能型珠边机HT-782珠边机, 并拟定新的起点;
In the year of 2005 , the company celebrate the 10th. Anniversary and researching a new generation of intelligent HT-782 hand sewing machine,
- ◆ 2006年相继开发了高级智能珠边机HT-798B, 至此弥补了珠边机不能变花样的空白;
In the year of 2006,the company researching and developing intelligent HT-798B hand sewing machine
Making up the blank
- ◆ 2012-2013年, 开始研发HT-400毛巾横头缝边机, HT-800浴巾横头缝边机, 从而进入毛巾生产自动化行业;
From 2012to 2013 , the company begin to developing HT-400 automatic towel cross hemming machine and HT-800 automatic bath towel cross hemming machine.
- ◆ 2014年开发了HT-560程控上袖机, HT-300A电脑链式珠边机;
In the year of 2014 , the company developing HT-560 computerized sleeve setting machine and HT-300A decorative chain stitch sewing machine
- ◆ 2015年开发了HT-6100D、HT-6100F两款全自动电脑假眼机;
In the year of 2015, researching and developing HT-6100D and HT-6100F computerized imitation buttonhole sewing machine.
- ◆ 2017年全自动毛巾双边纵缝机、全自动方巾包缝机, HT-313、HT-360双面呢暗缝机成功上市;
In the year of 2017 , researching and developing automatic double side length hemming towel machine, automatic kerchief stitching hemming towel machine ,HT-313 ,HT-360 blinding stitching

品质亨泰 誉满全球

——强大的生产力

——优秀的品质

——终身维修



HT-798F

高级电脑数控花样珠边机

COMPUTERIZED PATTERNED HAND STITCH SEWING MACHINE

 **Hengtai**® 亨泰

特点

Features

1. 液晶触摸屏

LCD touch screen

2. 起始倒回针功能

Start/End backtacking

3. 转角脱线功能

Corner stitching thread off

4. 放松缝线功能

Thread tension loosen

5. 手自一体剪线功能

Manual / Automatic thread trimmer

6. 采用德国EFKA电机

Equipped with EFKA motor




机器用途

用于缝制服装上的装饰性仿手工珠边，同时起到加固服装的作用，适用于西装、大衣、衬衫等，可用于不同厚度的面料。

Typical field of application

The machine is used for decorative hand stitching as well as reinforce stitching on the garment, such as business suit, overcoat, shirt, etc. It is suitable for various fabric thicknesses.

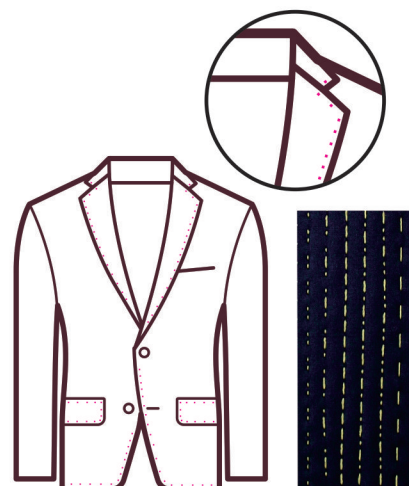

 仿手工缝边机 Decorative hand stitching	 缝制速度 Sewing speed	 最大压脚提升量 Max lift of the presser foot	 缝线根数 Thread number	 使用机针 Needle	 针杆 行程 Needle bar stroke	 针定位 Needle positioning	 下送料牙和交替式上送料牙 Top feed and bottom feed			
HT-798F	550 stitches/min	8 mm	1/900mm	780C 16#-23#	37 mm	A	A			
 手工线迹 Hand stitch	 盘式缝线梭 Disc stitching shuttle	 切线器 Thread trimmer	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 电子控制 Computer control	 可记忆花样数据 Storage number of sewing patterns		
0.5-7.0mm	A	A	锭子油 Spindle	0.5 Mpa	0.75 kW	220 V 50 Hz	A	100		

HT-798B

电脑数控花样珠边机

COMPUTERIZED DECORATIVE HAND STITCH SEWING MACHINE

 **Hengtai**® 亨泰

特点

Features

1. 液晶触摸屏幕

LCD touch screen

2. 起始倒回针功能

Start/End backtacking

3. 转角脱线功能

Corner stitching thread off

4. 放松缝线功能

Thread tension loosen

5. 手自一体剪线功能

Manual / Automatic thread trimmer

6. 采用德国EFKA电机

Equipped with EFKA motor




机器用途

用于缝制服装上的装饰性仿手工珠边，同时起到加固服装的作用，可用于不同厚度的面料。

Typical field of application

The machine is used for decorative hand stitching as well as reinforce stitching on the garment. It is suitable for various fabric thicknesses.

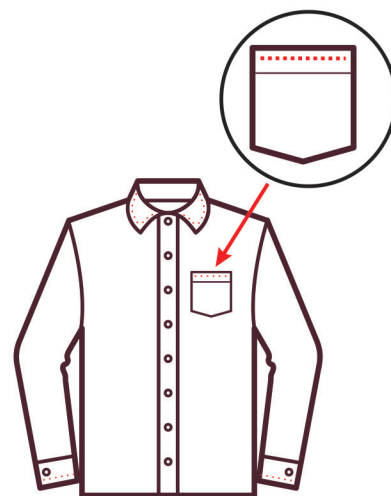

注：798B 用于中薄料
798G 用于厚料

798B Applicable thin & middle
798G Applicable thick

 仿手工缝纫机 Decorative hand stitching		 缝制速度 Sewing speed	 最大压脚提升量 Max lift of the presser foot		 缝线根数 Thread number	 使用机针 Needle		 针杆 行程 Needle bar stroke	 针定位 Needle positioning	 下送料牙和交替式上送料牙 Top feed and bottom feed	
HT-798B		500 stitches/min	8 mm		1/900 mm	780C 16#-23#		37 mm	A	A	
 手工线迹 Hand stitch	 盘式缝线梭 Disc stitching shuttle	 切线器 Thread trimmer	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 电子控制 Computer control	 可记忆花样数据 Storage number of sewing patterns			
0.5-7.0mm	A	A	锭子油 Spindle	0.5 Mpa	0.75 kW	220 V 50 Hz	A	100			

HT-795GA

高级电脑珠边机

COMPUTERIZED DECORATIVE HAND STITCH SEWING MACHINE



特点

Features

1. 液晶按键屏幕

LCD with button

2. 电脑数控

Computer electronic controlled

3. 放松缝线功能

Thread tension loosen

4. 手自一体剪线功能

Manual / Automatic thread trimmer

5. 采用国产电机

Equipped with domestic motor

6. 起始倒回针功能

Start/End backtacking




机器用途

用于缝制服装上的装饰性仿手工珠边，同时起到加固服装的作用，适用于时装系列等其他服装，可用于不同厚度的面料。

Typical field of application

The machine is used for decorative hand stitching as well as reinforce stitching on the garment, suitable for fashion design series. It is suitable for various fabric thicknesses.

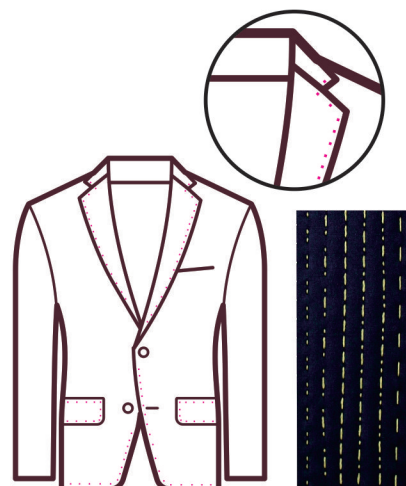

 仿手工缝边机 Decorative hand stitching		 缝制速度 Sewing speed	 最大压脚提升量 Max lift of the presser foot		 缝线根数 Thread number	 使用机针 Needle		 针杆行程 Needle bar stroke	 针定位 Needle positioning	 下送料牙和交替式上送料牙 Top feed and bottom feed	
HT-795GA		400 stitches/min	10 mm		1/900 mm	780C 16#-23#		37 mm	A	A	
 手工线迹 Stitch length	 盘式缝线梭 Disc stitching shuttle	 切线器 Thread trimmer	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 电子控制 Computer control	 可记忆花样数据 Storage number of sewing patterns			
0.5-7.0mm	A	A	锭子油 Spindle	0.5 Mpa	0.75 kW	220 V 50 Hz	A	100			

HT-785DD

电脑数控花样珠边机

COMPUTERIZED DECORATIVE HAND STITCH SEWING MACHINE



特点

Features

1. 液晶触摸屏
LCD touch screen
2. 起始倒回针功能
Star/End backtacking
3. 转角脱线功能
Corner stitching thread off
4. 放松缝线功能
Thread tension loosen
5. 手自一体剪线功能
Manual / Automatic thread trimmer
6. 采用国产电机
Equipped with domestic motor


HT-785/DF

机器用途

用于缝制服装上的装饰性仿手工珠边，同时起到加固服装的作用，适用于羊绒大衣、时装等，可用于不同厚度的面料。

Typical field of application

The machine is used for decorative hand stitching as well as reinforce stitching on the garment, such as cashmere coat, fashionable dress etc. It is suitable for various fabric thicknesses.

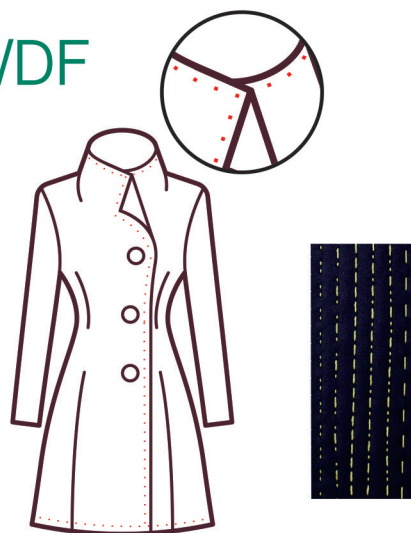

注：785DD 单电控 785DD Single control box
785DF 双电控 785DF Double control box

 仿手工缝边机 Decorative hand stitching		 缝制速度 Sewing speed	 最大压脚提升量 Max lift of the presser foot		 缝线根数 Thread number	 使用机针 Needle		 针杆 行程 Needle bar stroke	 针定位 Needle positioning	 下送料牙和交替式上送料牙 Top feed and bottom feed	
HT-785DD		400 stitches/min	8 mm		1/900 mm	780C 16#-23#		37 mm	A	A	
 手工线迹 Hand stitch	 盘式缝线梭 Disc stitching shuttle	 切线器 Thread trimmer	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 电子控制 Computer control	 可记忆花样数据 Storage number of sewing patterns			
0.5-7.0mm	A	A	锭子油 Spindle	0.5 Mpa	0.55 kW	220 V 50 Hz	A	100			

HT-300A-1

链式珠边机

DECORATIVE CHAINSTITCH SEWING MACHINE



特点

Features

1. 拐角处过度平稳--不断针，不断线

Stable corner stitch – no needle break, no thread break

2. 自动剪线功能

Automatic thread trimmer





机器用途

用于缝制服装上的装饰性链式珠边，适用于休闲装、西装、西裤、皮衣、衬衫等。

Typical field of application

The machine is used for the decorative chain stitch sewing on the garment, such as casual attire, business suit, trousers, leather clothing, leather garments, shirt, etc.



 链条式缝纫机 Chain stitch sewing machine		 缝制速度 Sewing speed	 最大压脚提升量 Max lift of the presser foot	 缝线根数 Thread number	 切线器 Thread trimmer	 使用机针 Needle	 针杆行程 Needle bar stroke	 单链缝 Single chain stitch	 碟式缝线梭 Butterfly shuttle
HT-300A-1		700-1600 stitches/min	6-8 mm	1	A	150-29-C 14#-18# 151-29-C 14#-18#	25.5 mm	1.5-2.5 mm	A
 针定位 Needle positioning	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 电子控制 Computer control				
A	自动加油 Automatic	0.5 Mpa	0.55 kW	220 V 50 Hz	N/A				

HT-1600 自动打条机

AUTOMATIC PINTUCK SEWING MACHINE



特点

Features

1. 打条打褶PTV 加工。适用于弹性面料。
Pintuck and tuck PTV processing. Suitable for elastic fabrics.
2. 一人可同时操作4台机器，节省用工成本
One person can operate four machines simultaneously, saving labor costs.
3. 褶长、褶宽及褶间距均可灵活调节。
The pleat length, pleat width and pleat spacing can be flexibly adjusted.
4. 支持单片至多层裁布同时打褶加工
Supports pleating processing from single piece to multi-layer cut fabrics simultaneously.
5. 配备电脑 PLC 显示屏操作界面，可预设参数并自动计算产能。
Equipped with a computer PLC display operation interface, which can preset parameters and automatically calculate production capacity.

机器用途

广泛用于衬衫，家纺的打条打褶PTV 加工。适用于梭织，针织等带弹性面料。

Typical field of application

Widely used for pintuck and tuck PTV processing of shirts and home textiles. Suitable for woven, knitted and other elastic fabrics.



 自动打条机 Automatic Strapping Machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 切线器 Thread trimmer	 使用机针 Needle	 立式旋梭 Vertical rotary hook	 单链缝 Single chain stitch	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input
HT-1600	3000 stitches/min	2	A	Db×1 14#-16#	A	A	0.5 Mpa	0.75 kW	220 V 50 Hz

HT-560DD

高级电脑上袖机

COMPUTERIZED SLEEVE SETTING MACHINE



特点

Features

1. 双电机上送料

Double motor up feeding

2. 液晶按键彩屏

LCD with buttons

3. 袖笼弧线导向功能


Armhole curve guiding

4. 起皱值分段设定

Wrinkle value define per segment

5. 起皱值临时加减

Wrinkle value control by pedal

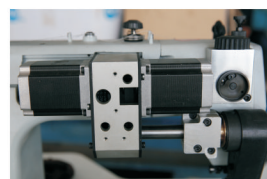

上送料带双电机示意图

机器用途

用于完成服装上袖工序的专用缝纫设备，并附加起皱效果，适用于西装、大衣、休闲装、童装等。

Typical field of application

The machine is used to complete the sleeve setting process. Meanwhile, the corresponding wrinkle value can be adjusted. It is typically applied on business suit, overcoat, casual attire, children wear, etc.



560A EFKA电机 EFKA motor
560DD 国产电机 Domestic motor

 平缝式缝纫机 Plain stitch sewing machine	 缝制速度 Sewing speed	 针杆行程 Needle bar stroke	 最大压脚提升量 Max lift of the presser foot	 缝线根数 Thread number	 使用机针 Needle	 针定位 Needle positioning	 锁式线迹 Lock stitch	 立式旋梭 Vertical rotary hook
HT-560DD	4000 stitches/min	41 mm	8 mm	2	134-35 DPX35 9#-16#	A	1.5-5.5 mm	A
 切线器 Thread trimmer	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 电子控制 Computer control	 可记忆花样数据 Storage number of sewing patterns		
A	锭子油 Spindle	0.5 Mpa	0.75 kW	220 V 50 Hz	A	100		

HT-550DD

高级电脑上袖机

COMPUTERIZED SLEEVE SETTING MACHINE



特点

Features

1. 单电机上送料

Single motor up feeding

2. 液晶按键彩屏

LCD with buttons

3. 袖笼弧线导向功能

Armhole curve guiding

4. 起皱值分段设定

Wrinkle value define per segment

5. 起皱值临时加減

Wrinkle value control by pedal



机器用途

用于完成服装上袖工序的专用缝纫设备，并附加起皱效果，适用于西装、大衣、休闲装、童装等。

Typical field of application

The machine is used to complete the sleeve setting process. Meanwhile, the corresponding wrinkle value can be adjusted. It is typically applied on business suit, overcoat, casual attire, children wear, etc.



550A EFKA电机 EFKA motor
550DD 国产电机 Domestic motor

 平缝式缝纫机 Plain stitch sewing machine	 缝制速度 Sewing speed	 针杆行程 Needle bar stroke	 最大压脚提升量 Max lift of the presser foot	 缝线根数 Thread number	 使用机针 Needle	 针定位 Needle positioning	 锁式线迹 Lock stitch	 立式旋梭 Vertical rotary hook
HT-550DD	4000 stitches/min	41 mm	8 mm	2	134~35 DPX35 9#-16#	A	1.5~5.5 mm	A
 切线器 Thread trimmer	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 电子控制 Computer control	 可记忆花样数据 Storage number of sewing patterns		
A	锭子油 Spindle	0.5 Mpa	0.75 kW	220 V 50 Hz	A	100		

HT-697AE

攀登切割机

LINING AND SHOULDER PAD ONTO ARMHOLE - ATTACHING AND TRIMMING MACHINE

 **Hengtai**® 亨泰

特点

Features

1. 自动切刀装置 – 切除缝合余料 Automatic trimmer for remaining material
2. 电脑数控送料差动 Electronic top / bottom differential feeding
3. 自动或手动松线装置 – 使线迹适应垫肩厚度 Automatic / Manual thread loosen – adapting the thread trace to the thickness
4. 带针交替上送料 Alternating up feeding with needle
5. 液晶触摸屏 LCD touch screen
6. 电脑数控调节针距、起皱值、夹线 Electronic adjust needle distance, Wrinkle value, thread clamp





机器用途

用于缝合西装袖笼与棉条、垫肩，完美切除缝合余料。

Typical field of application

The machine is used for attaching the shoulder pad and armhole lining onto the armhole, as well as trimming the remaining material perfectly.

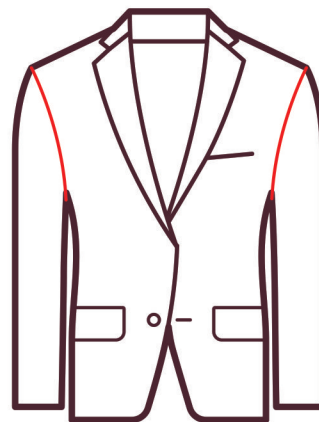

 刀式工业缝纫机 Trimming machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 使用机针 Needle	 锁式线迹 Lock stitch	 卧式梭芯 Horizontal type bobbin	 切线器 Thread trimmer	 下送料牙, 针送料和交替式上送料牙 Under feed dog, Needle feeding and alternate upper feed dog		
HT-697AE	1500stitches/min	2	190R 130#	2.0~9.0 mm	A	A	A		
 加油方式 Oil feeding	 电机功率 Motor power	 电源 Input							
锭子油 Spindle	0.75 kW	220 V 50 Hz							

HT-697BE

上袖里机

SLEEVE LINING SEWING MACHINE

 **Hengtai**® 亨泰

特点

Features

1. 电脑数控送料差动

Electronic top / bottom differential feeding

2. 自动或手动松线装置 – 使线迹适应垫肩厚度

Automatic / Manual thread loosen – adapting the thread trace to the thickness

3. 带针交替上送料

Alternating up feeding with needle

4. 液晶触摸屏

LCD touch screen

5. 电脑数控调节针距、起皱值、夹线

Electronic adjust needle distance, Wrinkle value, thread clamp





机器用途

用于西装缝合里衬和棉条。

Typical field of application

The machine is used for sewing the sleeve lining and armhole lining.

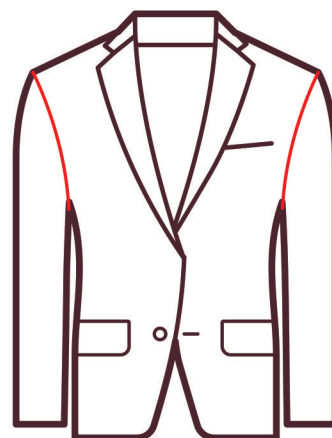

 工业缝纫机 Trimming machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 使用机针 Needle	 锁式线迹 Lock stitch	 卧式梭芯 Horizontal type bobbin	 切线器 Thread trimmer	 下送料牙, 针送料和交替式上送料牙 Under feed dog, Needle feeding and alternate upper feed dog
HT-697BE	1500stitches/min	2	190R 130#	2.0~9.0 mm	A	A	A
 加油方式 Oil feeding	 电机功率 Motor power	 电源 Input					
锭子油 Spindle	0.75 kW	220 V 50 Hz					

HT-6200F

电脑假眼机

COMPUTERIZED IMITATION BUTTONHOLE SEWING MACHINE

 **Hengtai®** 亨泰

特点

Features

1. 电脑控制各项参数：针距、长度、宽度等

The parameters are programmable, such as stitch length, buttonhole length, buttonhole width, etc.

2. 数控调节锁眼个数、间距，使缝制过程自动完成

The number of buttonholes, the distance between buttonholes are programmable to finish the sewing automatically.

3. 液晶触摸屏幕

LCD touch screen

4. 数控调节上停车位

The needle positioning is electronically controlled

5. 可缝制的斜角范围0到30度

Sewing at an angle of 0 to 30 degree




机器用途:

用于缝制服装袖口的装饰性假眼、锁眼，例如西服袖口、职业装袖口、休闲装袖口、大衣袖口等。

Typical field of application

The machine is used for sewing the decorative imitation buttonhole on the sleeve cuff, typically applied on business suit, overcoat, casual attire, etc.

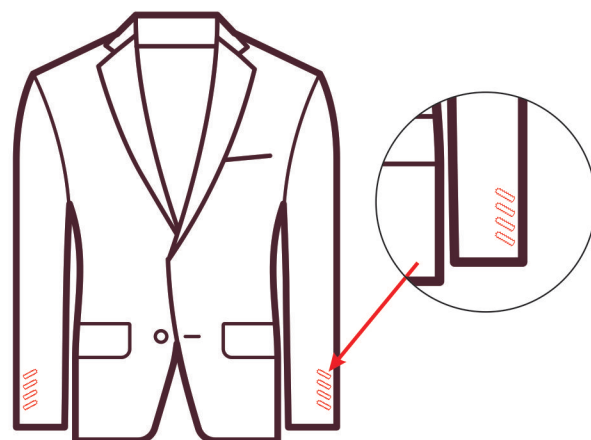

 链条式缝纫机 Chain stitch sewing machine	 缝制速度 Sewing speed	 使用机针 Needle	 针定位 Needle positioning	 单链缝 Single chain stitch	 切线器 Thread trimmer	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input
HT-6200F	1500~3500 stitches/min	EB X 750 14#-16#	A	A	A	锭子油 Spindle	0.6 Mpa	0.55 kW	220 V 50 Hz
 电子控制 Computer control	 可记忆花样数据 Storage number of sewing patterns								
A	20								

HT-6200D

电脑假眼机

COMPUTERIZED IMITATION BUTTONHOLE SEWING MACHINE

 **Hengtai**® 亨泰

特点

Features

1. 电脑控制各项参数：针距、长度、宽度等
The parameters are programmable, such as stitch length, buttonhole length, buttonhole width, etc.
2. 数控调节锁眼个数、间距，使缝制过程自动完成
The number of buttonholes, the distance between buttonholes are programmable to finish the sewing automatically.
3. 液晶触摸屏幕
LCD touch screen
4. 数控调节上停车位
The needle positioning is electronically controlled
5. 直线缝纫
Straight line stitching




机器用途:

用于缝制服装袖口的装饰性假眼、锁眼，例如西服袖口、职业装袖口、休闲装袖口、大衣袖口等。

Typical field of application

The machine is used for sewing the decorative imitation buttonhole on the sleeve cuff, typically applied on business suit, overcoat, casual attire, etc.

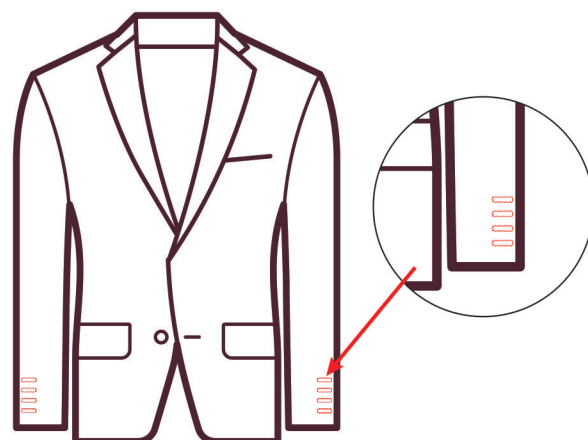

 链条式缝纫机 Chain stitch sewing machine	 缝制速度 Sewing speed	 使用机针 Needle	 针定位 Needle positioning	 单链缝 Single chain stitch	 切线器 Thread trimmer	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input
HT-6200D	1500~3500 stitches/min	EB X 750 14#-16#	A	A	A	锭子油 Spindle	0.6 Mpa	0.55 kW	220 V 50 Hz
 电子控制 Computer control	 可记忆花样数据 Storage number of sewing patterns								
A	20								

HT-160/32

单线电子控制暗缝套结机

COMPUTERIZED SINGLE THREAD BLIND STITCH BARTACKING MACHINE

 **Hengtai**® 亨泰

特点

Features

1. 叠针式加固缝线迹

Over stitch tacking thread trace

2. 自动剪线功能

Automatic thread trimmer

3. 可随意调节针数

Adjust stitches number freely

4. 液晶显示触摸屏

LCD display touch panel

5. 自动抬压脚功能


Automatic presser foot lift

6. 采用一体电控

Integrated electronic control

7. 深浅度循环功能

Depth circulation function




机器用途

用于服装的叠针式加固缝，将商标或标签缝制在毛衣、领带、外套、西装内衬、袖口及西裤等纺织品上。

Typical field of application

The machine is used for over stitch tacking on garments to install the labels onto the fabrics, such as sweater, tie, coat, suit lining, cuff, trousers, etc.

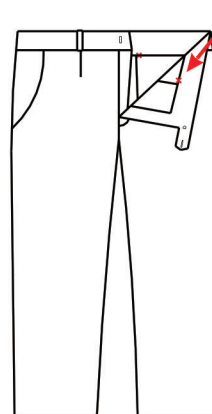

 链式工业缝纫机 Chain stitch industrial sewing machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 使用机针 Needle	 单链缝 Single chain stitch	 蝶式缝线梭 Butterfly shuttle	 针定位 Needle positioning	 切线器 Thread trimmer	 电子控制 Computer control	 加油方式 Oil feeding
HT-160/32	600~1300 stitches/min	1	29BD 11#~16#	A	A	A	A	A	锭子油 Spindle
 显示器 Monitor	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 可记忆花样数据 Storage number of sewing patterns					
A	0.5 Mpa	0.75 kW	220 V 50 Hz	100					

HT-160/21

单线电子控制暗缝套结机

COMPUTERIZED SINGLE THREAD BLIND STITCH BARTACKING MACHINE



特点

Features

1. 叠针式加固缝线迹

Over stitch tacking thread trace

2. 自动剪线功能

Automatic thread trimmer

3. 自动抬压脚功能

Automatic presser foot lift

4. 针数调节可选6. 8. 12针

6.8.12 stitches can be optional

5. 采用国产电机

Equipped with domestic motor

6. 缝纫深度可调节

Stitching depth adjust by knob




机器用途

用于服装的叠针式加固缝，将商标或标签缝制在毛衣、领带、外套、西装内衬、袖口及西裤等纺织品上。

Typical field of application

The machine is used for over stitch tacking on garments to install the labels onto the fabrics, such as sweater, tie, coat, suit lining, cuff, trousers, etc.

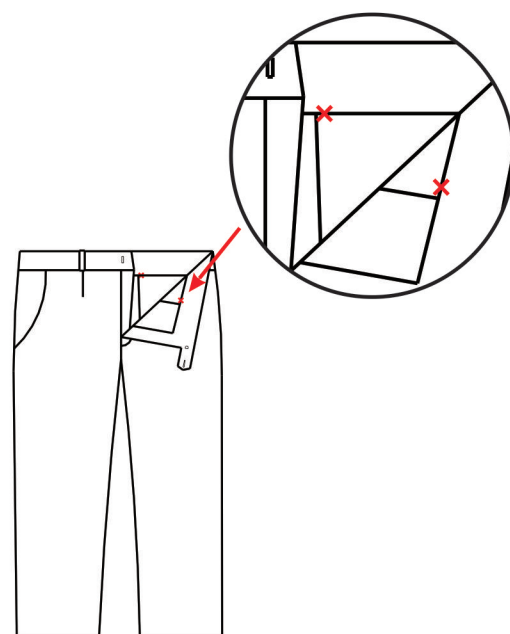

 链式工业缝纫机 Chain stitch industrial sewing machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 使用机针 Needle	 单链缝 Single chain stitch	 蝶式缝线梭 Butterfly shuttle	 针定位 Needle positioning	 切线器 Thread trimmer	 电子控制 Computer control	 加油方式 Oil feeding
HT-160/21	600~1300 stitches/min	1	29BD 11#~16#	A	A	A	A	A	锭子油 Spindle
 机械控制 Mechanical control	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input	 可记忆花样数据 Storage number of sewing patterns					
A	0.5 Mpa	0.75 kW	220 V 50 Hz	3					


HT-105
高速上下层止口机
EDGE TRIMMING MACHINE



- 特点
Features
- 1. 可用于不同厚度面料
Applicable for different fabric thicknesses
 - 2. 全自动供油
Automatic oil feeding
 - 3. 标准止口为3毫米
Standard edge: 3 mm

机器用途
用于缝制门襟、领襟的上下止口，适用于西装、大衣等。

Typical field of application
The machine is used for standard front edge trimming in the fly area of business suit, overcoat, etc.

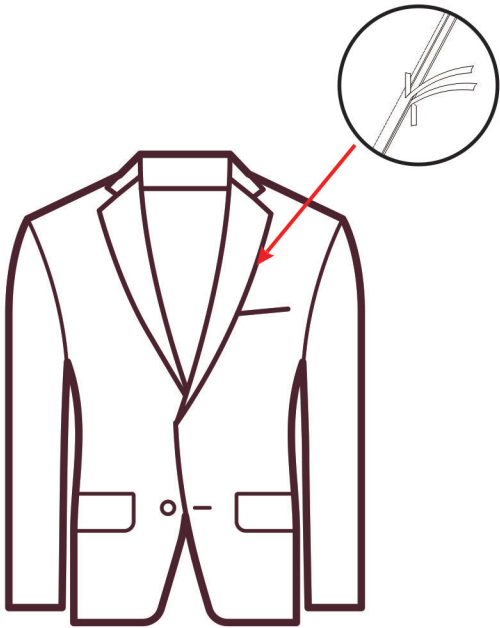

刀式工业缝纫机 Trimming machine	缝制速度 Sewing speed	最大压脚提升量 Max lift of the presser foot	止口宽度 Trimming width	加油方式 Oil feeding	电机功率 Motor power	电源 Input	电子控制 Computer control		
HT-105	2000 stitches/min	6/10 mm	3 mm	自动加油 Automatic	0.55 kW	220 V 50 Hz	A		

HT-2438N-7

手巾袋 暗缝人字机

BLIND STITCH SEWING MACHINE FOR POCKET ZIG-ZAG WAY

 **Hengtai**® 亨泰

特点

Features

1. 人字形半暗缝线迹

Zig-Zag thread trace hidden after sewing

2. 倒缝直线线迹

Straight thread trace on backtacking

3. 自动剪线功能

Automatic thread trimmer

4. 在高速运行时安静、平稳

Noiseless and stable at high speed




机器用途

用于前胸手巾袋的边缘缝制和商标缝制，适用于西装、职业装等。

Typical field of application

The machine is used for the pocket edge sewing or label sewing on the business suit and so on.

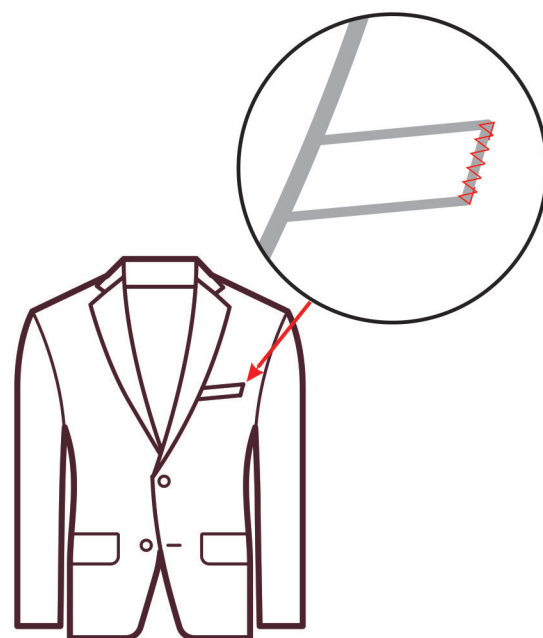

 平缝式缝纫机 Plain stitch sewing machine	 缝制速度 Sewing speed	 最大压脚提升量 Max lift of the presser foot	 缝线根数 Thread number	 切线器 Thread trimmer	 使用机针 Needle	 曲折缝 Zig-Zag sewing	 立式旋梭 Vertical rotary hook	 锁式线迹 Lock stitch
HT-2438N-7	2200 stitches/min	6-8 mm	2	A	PFX134EL 12#-16#	3 mm	A	A
 下送料牙 Bottom feed	 显示器 Monitor	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input			
A	A	自动加油 Automatic	0.5 Mpa	0.75 kW	220 V 50 Hz			

HT-333A

单针筒式复衬机

SINGLE NEEDLE CYLINDER BASTING MACHINE FOR SHOULDER PAD



特点

Features

1. 缝线跟随缝料滑移

Thread shifting along with workpiece

2. 缝线张力控制

Thread tension adjustable

3. 脚踏控制单针点缝

Single needle tacking by pedal

4. 自动剪线功能

Automatic thread trimmer





机器用途

用于临时固定服装的肩垫，可做点缝、疏缝，适用于西装、大衣等。

Typical field of application

The machine is used for tacking and basting on the shoulder pads of business suit, overcoat, etc.

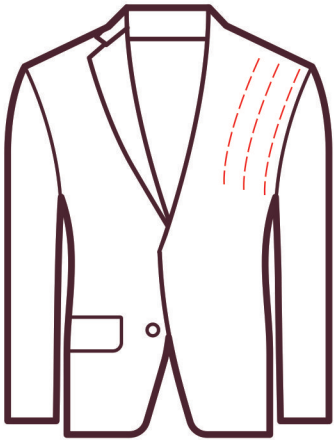

 平缝式缝纫机 Plain stitch sewing machine	 缝制速度 Sewing speed	 最大压脚提升量 Max lift of the presser foot	 缝线根数 Thread number	 切线器 Thread trimmer	 使用机针 Needle	 针杆行程 Needle bar stroke	 针定位 Needle positioning	 锁式线迹 Lock stitch
HT-333A	1100 stitches/min	19 mm	2	A	MTX190R 14#-16#	35 mm	A	A
 立式旋梭 Vertical rotary hook	 加油方式 Oil feeding	 电机功率 Motor power	 电源 Input	 电子控制 Computer control				
A	锭子油 Spindle	0.55 kW	220 V 50 Hz	A				

HT-1000

单针平面复衬机

SINGLE NEEDLE FLAT-BED TACKING AND BASTING MACHINE

 **Hengtai**® 亨泰

特点

Features

1. 自动剪线功能

Automatic thread trimmer

2. 伺服马达

Servomotor

3. 脚踏控制单针点缝

Single needle tacking by pedal

4. 自动供油

Automatic oil feeding

5. 自动抬压脚功能

Automatic presser foot lift





机器用途

用于服装的平面复衬工序，适用于西服、大衣、休闲装等。

Typical field of application

The machine is used for the flat-bed tacking and basting process. It is applicable for business suit, over coat, casual attire, etc.

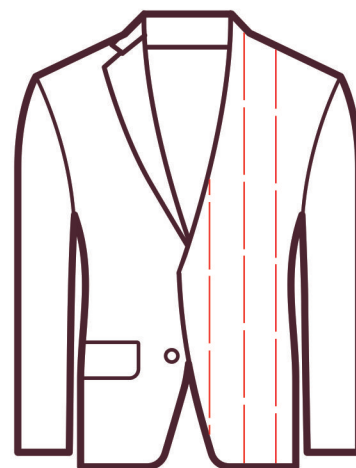

 平缝式缝纫机 Plain stitch sewing machine	 缝制速度 Sewing speed	 针杆行程 Needle bar stroke	 最大压脚提升量 Max lift of the presser foot	 缝线根数 Thread number	 使用机针 Needle	 针定位 Needle positioning	 锁式线迹 Lock stitch	 立式旋梭 Vertical rotary hook
HT-1000	800 stitches/min	30.2 mm	15 mm	2	DBX1 11#-14#	A	A	A
 切线器 Thread trimmer	 加油方式 Oil feeding	 电机功率 Motor power	 电源 Input	 电子控制 Computer control				
A	自动加油 Automatic	0.55 kW	220 V 50 Hz	N/A				

HT-313A

双面呢暗缝机

DOUBLE FACE CASHMERE BLIND STITCH MACHINE



特点



Features

1. 定位装置进料功能

Positioning system feeding

2. 双线弯针人字暗缝

Double thread curved needle zig-zag stitch

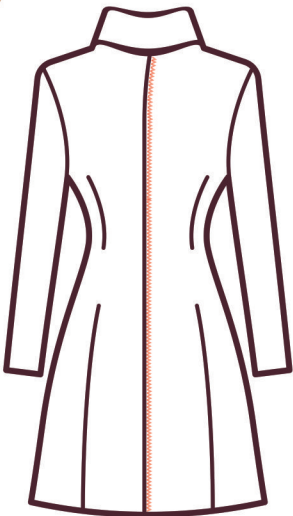

机器用途

用于双面尼面料的缝合、拼接，适用于双面尼大衣。
采用暗缝工艺，缝制后织物表面看不到缝纫痕迹。

Typical field of application

The machine is used for the joint part stitching of double face cashmere, typically the cashmere overcoat. Using the Blind stitch technique is to hide the thread trace after sewing.



 双面呢暗缝机 Double face cashmere machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 使用机针 Needle	 锁式线迹 Lock stitch	 立式旋梭 Vertical rotary hook	 针定位 Needle positioning	 手动切线器 Hand trimmer	 加油方式 Oil feeding	 空气压力 Air pressure
HT-313A	800-1500 stitches/min	2	1717DC	A	A	A	A	锭子油 Spindle	0.5 Mpa
 电机功率 Motor power	 电源 Input	 电子控制 Computer control							
0.75 kW	220 V 50 Hz	A							

HT-360A
双面呢暗缝机
DOUBLE FACE CASHMERE MACHINE



- 特点
Features
- 1. 单/双包卷边筒装置
Single/double rolling cylinder feeding
 - 2. 双线弯针人字暗缝
Double thread curved needle zig-zag stitch



机器用途

用于双面尼面料的边缘缝制，如门襟、下摆、领边、袖口、袋口等。采用暗缝工艺，缝制线迹不外露。

Typical field of application

The machine is used for the edge sewing on double face cashmere, such as fly front, hem, collar edge, sleeve opening, pocket edge, etc. Using the Blind stitch technique is to hide the thread trace after sewing.



 双面呢暗缝机 Double face cashmere machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 使用机针 Needle	 锁式线迹 Lock stitch	 立式旋梭 Vertical rotary hook	 针定位 Needle positioning	 手动切线器 Hand trimmer	 加油方式 Oil feeding	 空气压力 Air pressure
HT-360A	800-1500 stitches/min	2	1717DC	A	A	A	A	锭子油 Spindle	0.5 Mpa
 电机功率 Motor power	 电源 Input	 电子控制 Computer control							
0.75 kW	220 V 50 Hz	A							

HT-370AG

电脑双面呢暗缝机

COMPUTER DOUBLE FACE CASHMERE MACHINE

 **Hengtai® 亨泰**

特点

Features

1. 定位装置进料功能

Positioning system feeding

2. 双线弯针人字暗缝

Double thread curved needle zig-zag stitch

3. 触摸显示屏操作

The product supports touchscreen operation



机器用途

用于双面尼面料的边缘缝制，如门襟、下摆、领边、袖口、袋口等。采用暗缝工艺，缝制线迹不外露。

Typical field of application

The machine is used for the edge sewing on double face cashmere, such as fly front, hem, collar edge, sleeve opening, pocket edge, etc. Using the Blind stitch technique is to hide the thread trace after sewing.



注：370A 采用进口旋梭
370AG 采用国产旋梭
370AG-1 上托布轮
370AG-2 上下托布轮

 双面呢暗缝机 Double face cashmere machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 使用机针 Needle	 锁式线迹 Lock stitch	 立式旋梭 Vertical rotary hook	 针定位 Needle positioning	 手动切线器 Hand trimmer	 加油方式 Oil feeding	 电机功率 Motor power
HT-370AG	800-1500 stitches/min	2	1717DC	A	A	A	A	锭子油 Spindle	0.75 kW
 电源 Input	 电子控制 Computer control								
220 V 50 Hz	A								

HT-363AG

电脑双面呢暗缝机

COMPUTER DOUBLE FACE CASHMERE MACHINE

 **Hengtai® 亨泰**

特点

Features

1. 定位装置进料功能



Positioning system feeding

2. 双线弯针人字暗缝

Double thread curved needle zig-zag stitch

3. 触摸显示屏操作

The product supports touchscreen operation

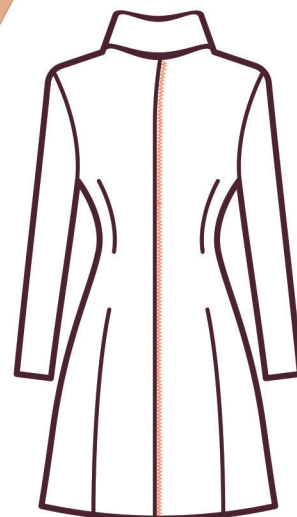

机器用途

用于双面尼面料的缝合、拼接，适用于双面尼大衣。

采用暗缝工艺，缝制后织物表面看不到缝纫痕迹。

Typical field of application

The machine is used for the joint part stitching of double face cashmere, typically the cashmere overcoat. Using the Blind stitch technique is to hide the thread trace after sewing.



注：363A 采用进口旋梭
363AG 采用国产旋梭
363AG-1 上托布轮
363AG-2 上下托布轮

 双面呢暗缝机 Double face cashmere machine	 缝制速度 Sewing speed	 缝线根数 Thread number	 使用机针 Needle	 锁式线迹 Lock stitch	 立式旋梭 Vertical rotary hook	 针定位 Needle positioning	 手动切线器 Hand trimmer	 加油方式 Oil feeding	 电机功率 Motor power
HT-363AG	800-1500 stitches/min	2	1717DC	A	A	A	A	锭子油 Spindle	0.75 kW
 电源 Input	 电子控制 Computer control								
220 V 50 Hz	A								

HT-38系列 贝形装饰边包缝机

SHELL STITCH OVERLOCK SEWING MACHINE



特点

Features

1. 简易变更贝形针数装置

Easy-to-change device for the number of shell-shaped stitches

2. 任何种类线均可以缝制，包括毛线

Capable of sewing with any type of thread, including woolen yarn

3. 只要是有装饰边要求的布料，不论是薄料还是厚料都可以适应

Suitable for fabrics that require decorative edges, whether thin or thick



机器用途

用于缝制服装上弧线包边与花型装饰，同时起到加固服装的作用，适用于时装系列等其他服装，可用于不同厚度的面料。

Typical field of application

Used for sewing arc-shaped hems and pattern decorations on garments, and at the same time, it plays a role in reinforcing garments. Applicable to fashion series and other garments, and can be used with stitches. Suitable for fabrics of different thicknesses.

	机型 MOODEL		
	HT-38	HT-27	HT-17
针 Needle	DBX1#19-24	DBX1#19-22	DCX1#19-21
线迹 Stitch Forms	1 4 8	1 4 8	3 6
贝形大小 Shell Size	大 large 	中Medium 	小Small
可缝厚度 Sewable Thickness	6mm	5mm	2.8mm
转速 Speed	1200s.p.m	1700s.p.m	1900s.p.m

贝形装饰边包缝机 Shell stitch overlock sewing machine	缝制速度 Sewing speed	最大压脚提升量 Max lift of the presser foot	缝线根数 Thread number	使用机针 Needle	针杆行程 Needle bar stroke	单链缝 Single chain stitch	下送料牙 Bottom feed dog
TH-38	1200 stitches/min	5 mm	2	DBX1#19-24	37 mm	A	A

HT-171

双线锁式撬边机

TWO-THREAD LOCKSTITCH BLINDHEMMING MACHINE



- 特点
- Features
- 1.双线锁式线迹结构
- Double-thread lockstitch structure
- 2.自动送布系统
- Automatic fabric feeding system
- 3.可调节撬边宽度与深度
- Adjustable hemming width and depth
- 4.静音低振动设计
- Mute and low-vibration design
- 5.简易穿线装置
- Easy threading device
- 6.兼容多种针距与线型
- Compatible with various stitch lengths and thread types

机器用途

用于服装下摆、袖口等部位的隐形撬边作业，线迹整齐美观且牢固，适用于西装、衬衫、女装、针织面料等多种材质，支持薄至中厚面料的高效处理。

Typical field of application

It is used for invisible hemming operations on parts such as clothing hems and cuffs. The stitches are neat, beautiful and firm. It is suitable for various materials such as suits, shirts, women's clothing and knitted fabrics, and supports efficient processing of thin to medium-thick fabrics.

 双线锁式撬边机 Decorative hand stitching	 缝制速度 Sewing speed	 最大压脚提升量 Max lift of the presser foot	 缝线根数 Thread number	 使用机针 Needle	 针杆行程 Needle bar stroke	 针定位 Needle positioning	 上送料牙 Upper feed dog
TH-171	1200 stitches/min	15 mm	2	LW-C5 80/12	3-8 mm	A	A
 单链缝 Single chain stitch	 旋梭	 加油方式 Oil feeding	 空气压力 Air pressure	 电机功率 Motor power	 电源 Input		
A	A	锭子油 Spindle	0.5 Mpa	0.5 kW	220 V 50 Hz		